



2700K - 6000K



COB
40W LED



Flicker Free



92
CRI



Fan-free

AShow S40T HD 1530/2550 is a 40W tunable COB LED profile spot. Die-casting housing, fan-free design. With 15° - 30°/25°-50° zoom lens, color temperature 2700K - 6000K. It's an idea product for art gallery, museum, shoping mall.


Key features:

- 40W WW+40W CW constant output LED
- 2700K - 6000K adjustable
- High CRI of 92
- Quick switching between light hook and track versions
- 15° - 30°/25°-50° zoom lens
- Smooth dimming, flicker free
- Compact body, easy to set up
- Knob, buttons, DMX Control Dimming
- Equipped with wireless CRMX function and original Lumen Radio
- High definition optics


Application:

- Museum
- Theatre, church
- Shopping mall
- Art gallery
- Restaurant


Accessories:



Gel frame



Gobo holder
(opt.)

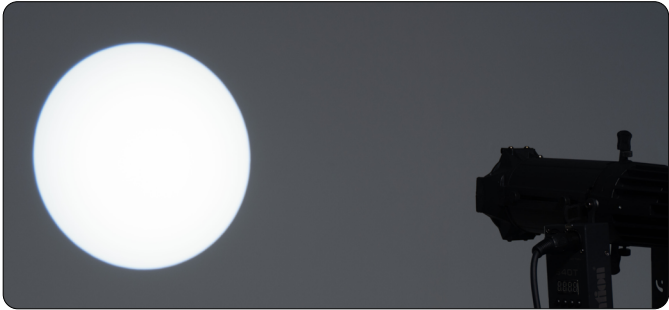


AShow S40T HD1530/2550

40W tunable LED profile spot




Photometric


WW(lx)	9130	2850	1280	758	500
CW(lx)	12100	3790	1690	995	650
Full on (lx)	9120	2950	1320	770	514

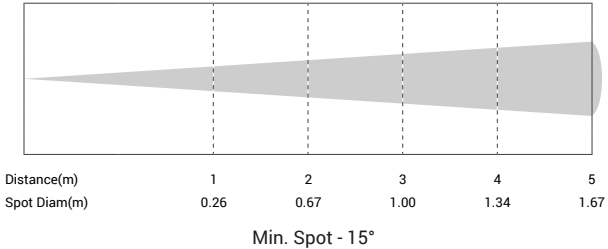

WW(lx)	4240	1280	526	354	244
CW(lx)	4670	1600	744	460	288
Full on (lx)	4360	1260	553	381	245

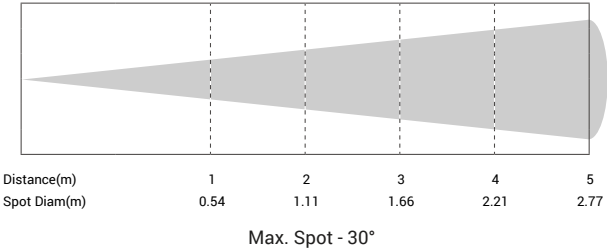

Color Rendition - 4000K

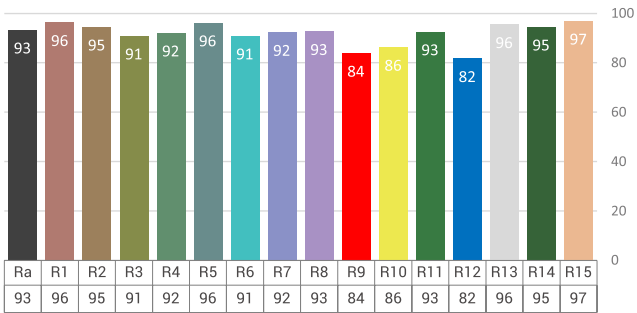

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W WW + 40W CW
Color temperature:	2700K - 6000K adjustable
Zoom range:	15° - 30°/25°-50°
Color Rendition:	Avg. CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

Control mode:	DMX512, CRMX, knob
Housing:	Color black, die-casting aluminum
Size:	340 x 168 x 85mm
N.W.:	1.9kg
Environment:	IP20